

# MOJO ATTACK

Portable Dual Channel Floor Amplifier

## Owner's Manual

### Specifications

Built-in Boost: Max. +12 dB pure clean boost  
Power Requirement: 18-20V DC center positive  
Current Consumption: Min. 4.5A

Speaker Output: 4-16Ω, self-adaptive  
Max. Output Power (19V):

75 Watts @ 4Ω / 40 Watts @ 8Ω / 20 Watts @ 16Ω

Dimensions: 190mm(D) × 118.5mm(W) × 53.5mm(H)

Weight: 792g (without PSU)


**IMPORTANT: TURN ON FIRST, TURN OFF LAST.**

Always mute the mixer/audio interface or turn down the volume knob on your amp before plugging or unplugging power jacks, cables, etc.


When you're using a mixer or an audio interface, please adjust the knobs onboard carefully to avoid signal clipping.

This unit CANNOT be supplied by phantom power.

- 1 CH A: Hotone Mojo Diamond, inspired by legendary Fender Tweed\*
- CH B: Hotone Heart Attack, inspired by legendary Mesa Boogie Rectifier\*
- BASS/MIDDLE/TREBLE: Controls the low, mid and high frequency response
- GAIN: Controls the gain amount
- VOL. : Controls the output volume

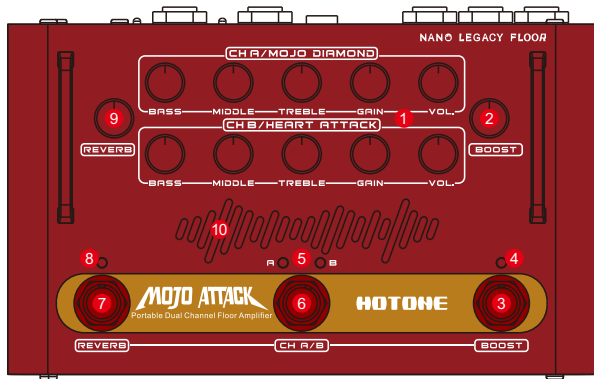

- 2 0 to +12 dB of clean boost
- 3 Boost on/off switch
- 4 Boost on/off status light
- 5 Amp channel status light (CH A=green, CH B=red)
- 6 Amp channel A/B switch
- 7 Reverb on/off switch
- 8 Reverb on/off status light
- 9 Reverb knob
- 10 Amp on/off status light
- 11 Guitar connection jack

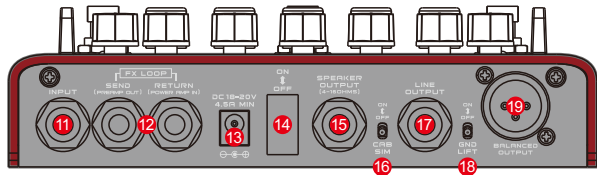

- 13 18-20V DC adapter plug (center positive)
- 14 Unit on/off switch
- 15 Cabinet connector jack (4-16Ω)
- 16 Cab sim on/off switch (works on both LINE OUTPUT and BALANCED OUTPUT jacks)
- 17 1/4" (6.35mm) TRS jack (connect to your mixer or audio interface)
- 18 BALANCED OUTPUT jack ground wire lift switch (eliminates hum noise)
- 19 Balanced XLR output jack (connect to your mixer or audio interface)

- 12 FX Loop jacks:  
SEND: Connect to your effects input (or use as a preamp output)  
RETURN: Connect to your effects output (or use as a power amp input)

\*Fender Tweed is an amplifier model of Fender Musical Instruments Corporation.  
Mesa Boogie Rectifier is an amplifier model of Mesa/Boogie Ltd.  
The mentioned manufacturer and product names are trademarks or registered trademarks of their respective owners. The trademarks were used merely to identify the sound character of the product.